


"SLIM-TRACK" 2-SECTION BALL BEARING SLIDE MODEL: ESBM2

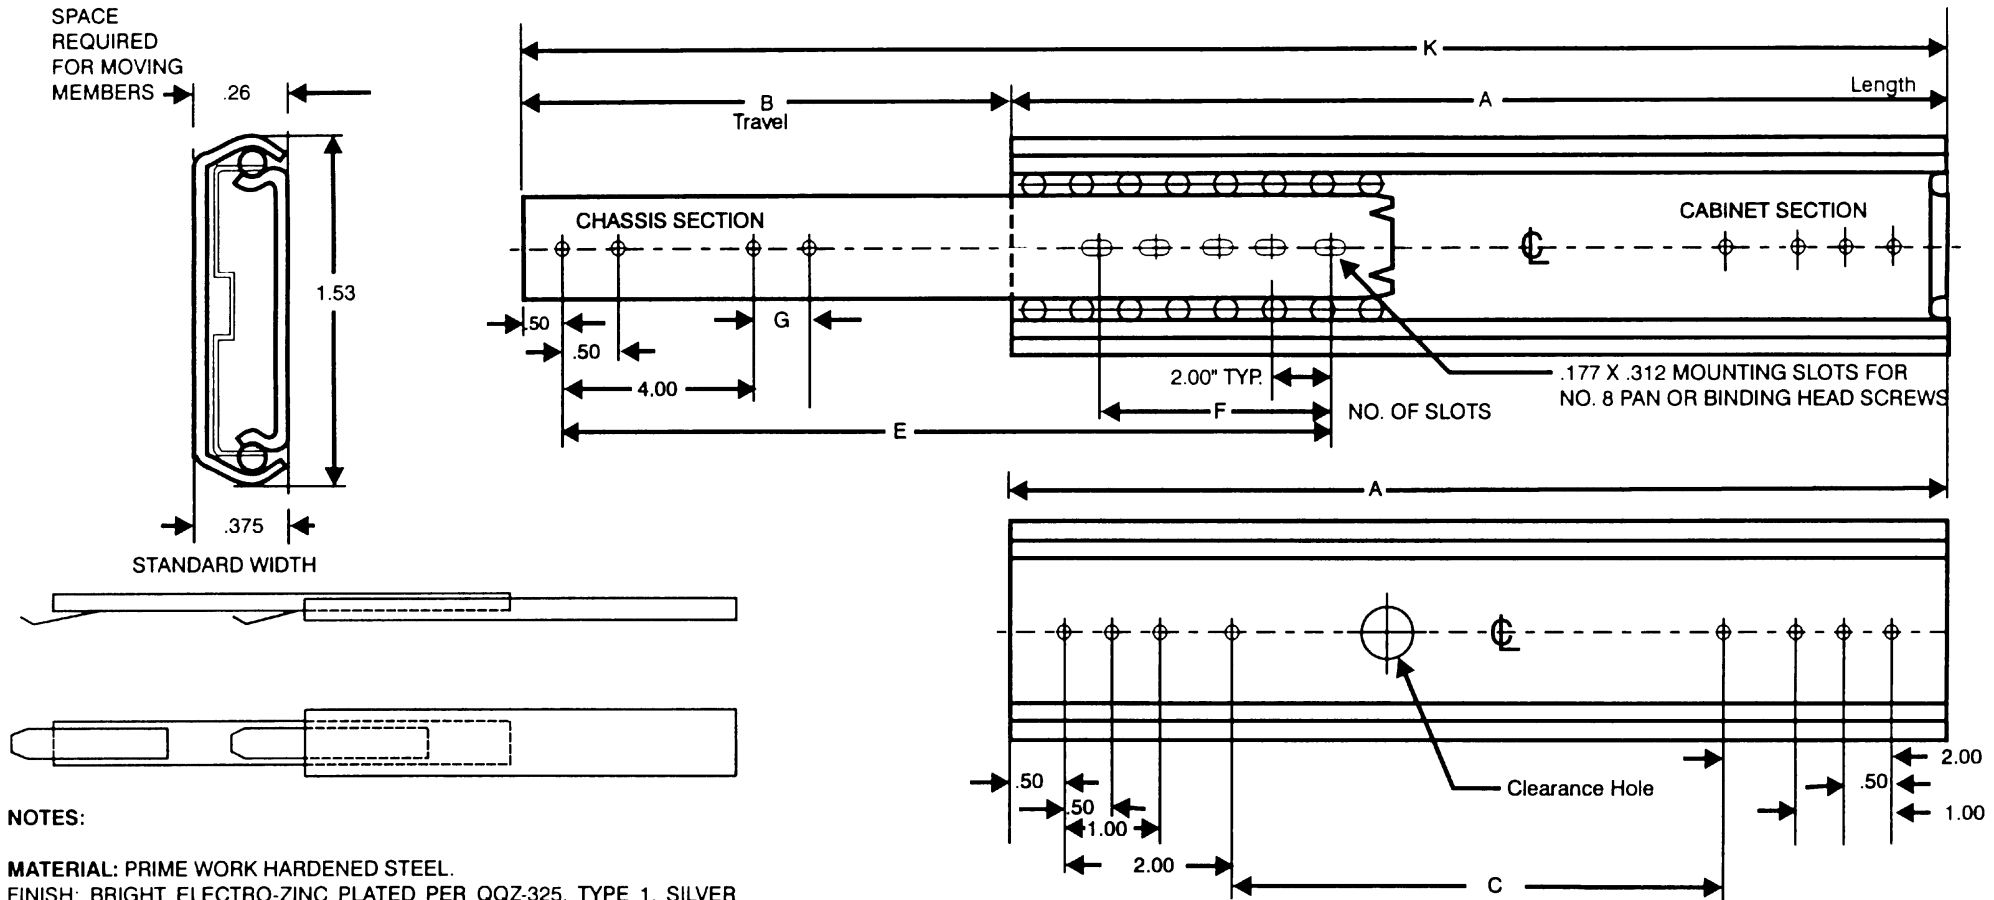


NOTES:

MATERIAL: PRIME WORK HARDENED STEEL.
FINISH: BRIGHT ELECTRO-ZINC PLATED PER QQZ-325. TYPE 1, SILVER COLOR.
 ALL MOUNTING HOLES ARE .177 DIA. FOR NO. 8 PAN OR BINDING HEAD SCREWS.
 MOUNTING HOLE AND SLOT LOCATION TOLERANCE ± .015.
 LOAD CAPACITY TO 120 LBS.*
 * Load ratings are based on a pair of 18" slides with standard extension.
 Choice of positive locking in both directions in extended position or stop-out only which enables easy entry of chassis into cabinet without manipulation of catches.
 Choice of combinations of lengths, engagements, mounting hole patterns, etc., available at Barnes Engineering Company, service at a nominal cost, or, in many cases at no additional cost.
 Additional holes available at Barnes Engineering Co.'s option.

When ordering, please specify features needed: e.g.
 ESBM2-20-SO (Stop-out when extended)
 PL (Positive lock when extended)
 ND (Non disconnect)
 FD (Fast disconnect)
 LI (Lock in when closed)
 SS (Stainless steel)

Brackets and hardware available; see bracket pages.
 Hole pattern may vary with (-PL, -FD) and -LI features.

SLIDE DIMENSIONS							
MODEL	A	B	C	E	F	G	K
ESB2-10	10	7	5	4.50	1		17
ESB2-12	12	9	7	6.50	1		21
ESB2-14	14	11	9	8.50	1		25
ESB2-16	16	12	11	10.50	2		28
ESB2-18	18	13	13	12.50	2		31
ESB2-20	20	15	15	14.50	2	2	35
ESB2-22	22	16	17	16.50	3	2	38
ESB2-24	24	17	19	18.50	3	2	41
ESB2-26	26	19	21	20.50	5	2	45
ESB2-28	28	20	23	22.50	5	2	48
ESB2-30	30	22	25	24.50	5	2	52



BARNES ENGINEERING COMPANY
 2715 DELTA PLACE
 COLORADO SPRINGS, CO 80910
 800-995-6050 PHONE
 719-390-6700 FAX
 www.slimtrack.com

AUG 1996