


Slim-Track 2-Section Solid Bearing Slides

MODEL:EST2

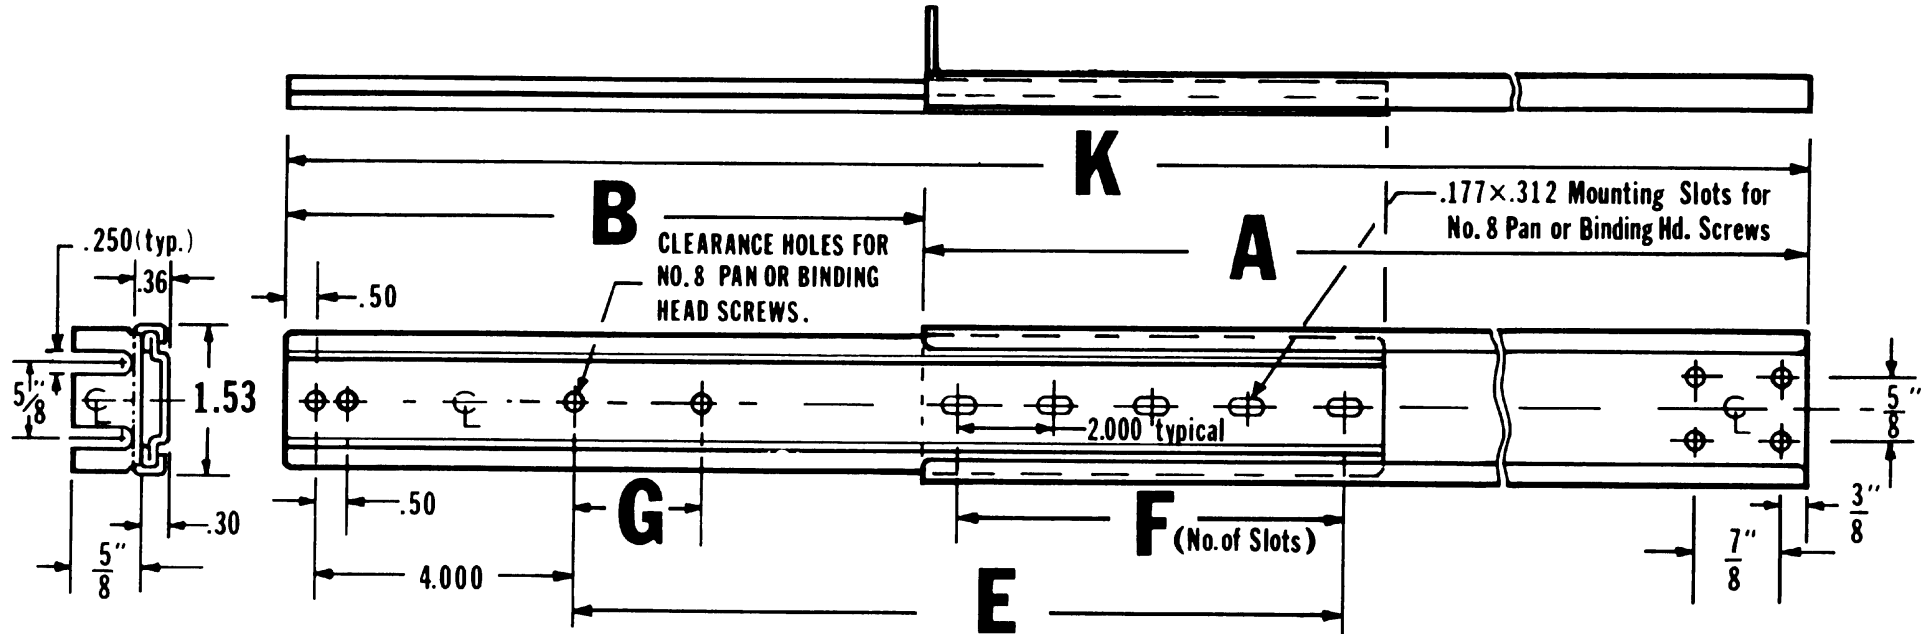

NOTES:

Solid Bearing, Superior Performance against High Shock and Vibration. Built-in Permanent Dry Lubricant. Never needs Oiling. WHEN Ordering, Specify as: EST2-20-PL (Positive Locking when extended) or EST2-20-SO (Stop-Out Only). For Fast Disconnect, Specify as: FD

ALL HARDWARE Stainless Steel or Zinc Plated.

FINISH: Molybdenum Disulphide Dry Lubricant, baked on at 400° per Mil-L-25504, over Phosphate Coating per Mil-P-16232, Type M.

MATERIAL: Prime, hard Cold Rolled Steel. All parts built to Military Specifications.

*LOAD CAPACITY: Up to 300 Pounds in Extended Position.

SLIDES Shipped with Standard Rear Mounting Bracket (2")

IF Specified, any one of the following Size Rear Mounting Brackets will be shipped with Slides: 4"-6"-8"-10"-12"

* Load Ratings are based on a pair of 18" Slides with Standard Extension

MODEL NO.	A	B	E	F	G	K
EST2-10	10	7	4.50	1		17
EST2-12	12	9	6.50	1		21
EST2-14	14	11	8.50	1		25
EST2-16	16	12	10.50	2		28
EST2-18	18	13	12.50	2		31
EST2-20	20	15	14.50	2	2	35
EST2-22	22	16	16.50	3	2	38
EST2-24	24	17	18.50	3	2	41
EST2-26	26	19	20.50	5	2	45
EST2-28	28	20	22.50	5	2	48
EST2-30	30	22	24.50	5	2	52

Choice of Positive Locking in both directions in extended position or Stop-Out Only (Stops coming OUT, but Can be pushed back into Cabinet without releasing any Catches), enabling easy entry of Chassis into Cabinet without manipulation of Catches.

BARNES ENGINEERING COMPANY
 2715 DELTA PLACE
 COLORADO SPRINGS, CO 80910
 800-995-6050 PHONE
 719-390-6700 FAX
 www.slimtrack.com