


"SLIM TRACK" 3-SECTION BALL-BEARING SLIDE MODEL: F1B

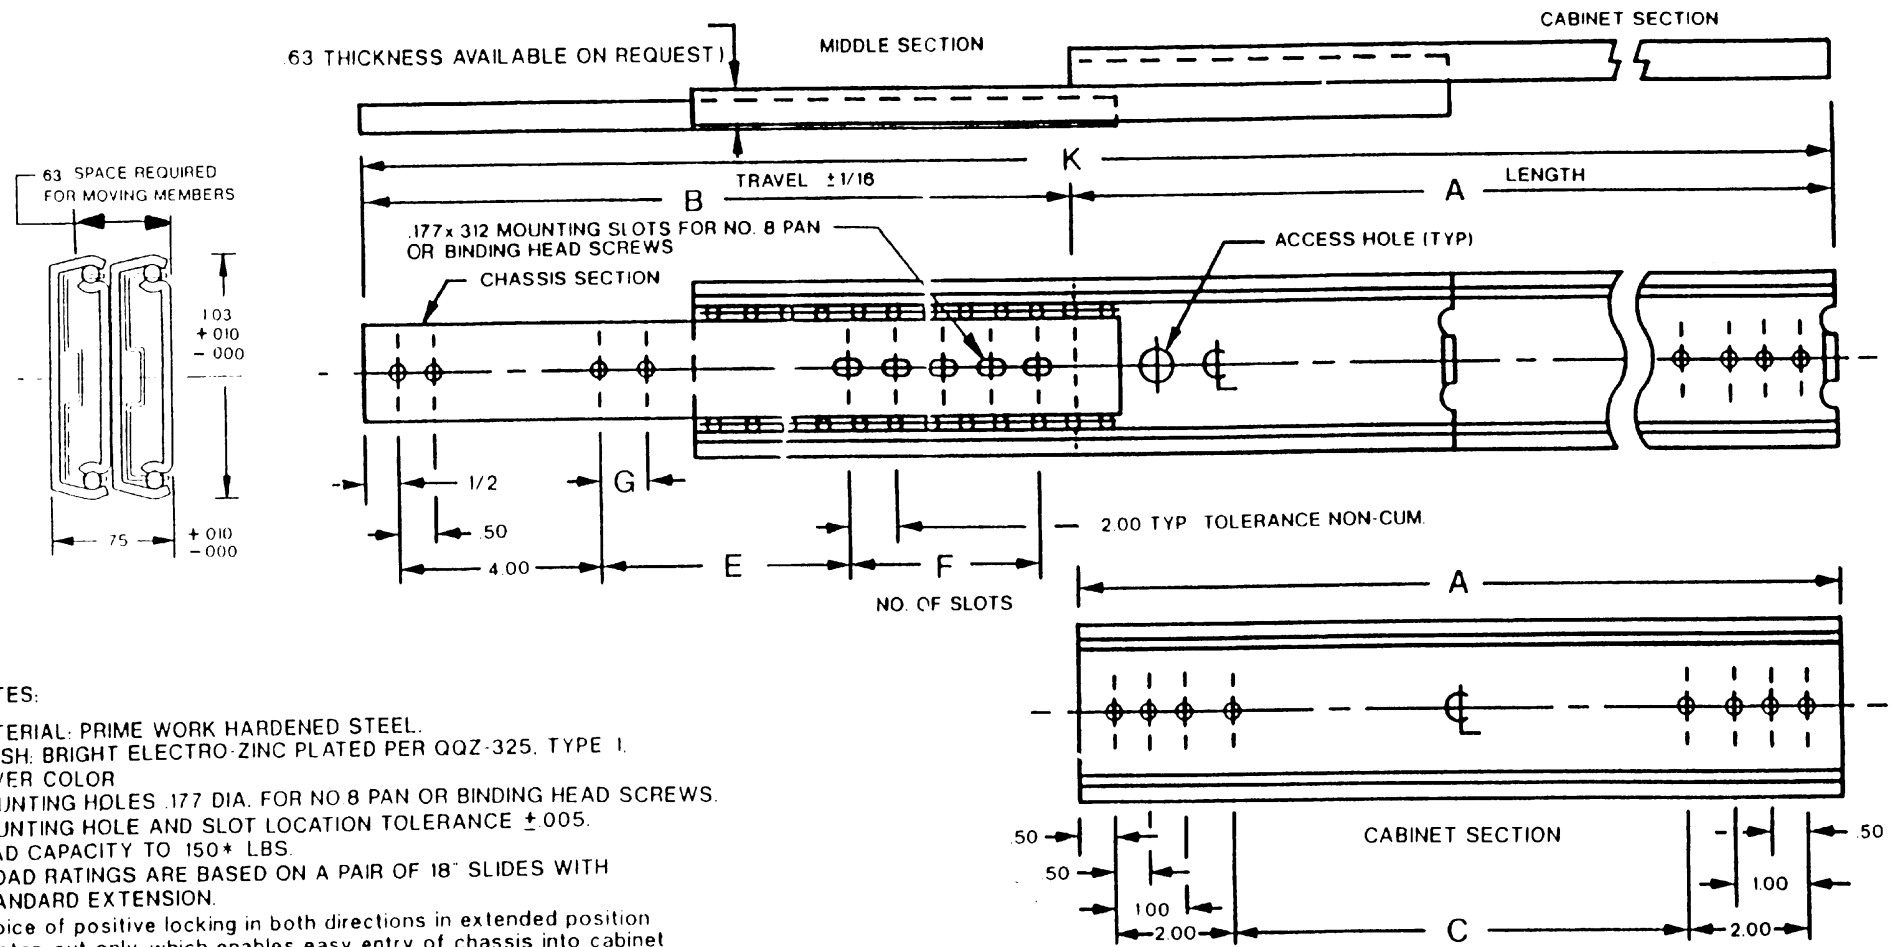

NOTES:

MATERIAL: PRIME WORK HARDENED STEEL.
 FINISH: BRIGHT ELECTRO-ZINC PLATED PER QQZ-325, TYPE I.
 SILVER COLOR
 MOUNTING HOLES .177 DIA. FOR NO 8 PAN OR BINDING HEAD SCREWS.
 MOUNTING HOLE AND SLOT LOCATION TOLERANCE $\pm .005$.
 LOAD CAPACITY TO 150* LBS.
 *LOAD RATINGS ARE BASED ON A PAIR OF 18" SLIDES WITH STANDARD EXTENSION.
 Choice of positive locking in both directions in extended position or stop-out only which enables easy entry of chassis into cabinet without manipulation of catches.
 Any choice of combinations of lengths, engagements, mounting hole patterns, etc., available at Barnes Engineering Company service at a nominal cost, or, in many cases at no additional cost.
 Any load requirement available by stacking vertically and/or horizontally.
 Additional holes available at Barnes Engineering Co.'s option.

OUTER (CABINET SECTION) MOUNTING DETAILS SHOWN HERE FOR CLARITY


When ordering, please specify features needed; e.g.

- F1B-20-PL (Positive locking when extended).
- F1B-20-SO (Stop-out only).
- FD (Fast disconnect)
- LI (Lock in)
- F1BM (Military models).

Brackets and hardware available; see bracket pages.

Hole pattern may vary with (-PL-FD) and -LI features.

SLIDE DIMENSIONS							
MODEL	A	B	C	E	F	G	K
F1B-10	10	11	5	4.50	1		21
F1B-12	12	13	7	6.50	1		25
F1B-14	14	15	9	6.50	2		29
F1B-16	16	17	11	8.50	2		33
F1B-18	18	19	13	8.50	3		37
F1B-20	20	21	15	10.50	3	2	41
F1B-22	22	23	17	10.50	4	2	45
F1B-24	24	25	19	12.50	4	2	49
F1B-26	26	27	21	12.50	5	2	53
F1B-28	28	29	23	14.50	5	2	57
F1B-30	30	31	25	16.50	5	2	61



BARNES ENGINEERING COMPANY
 2715 DELTA PLACE
 COLORADO SPRINGS, CO 80190
 800-995-6050 PHONE
 719-390-6700 FAX
 www.slimtrack.com