


"SLIM TRACK" 2-SECTION BALL-BEARING SLIDE MODEL: HD2B

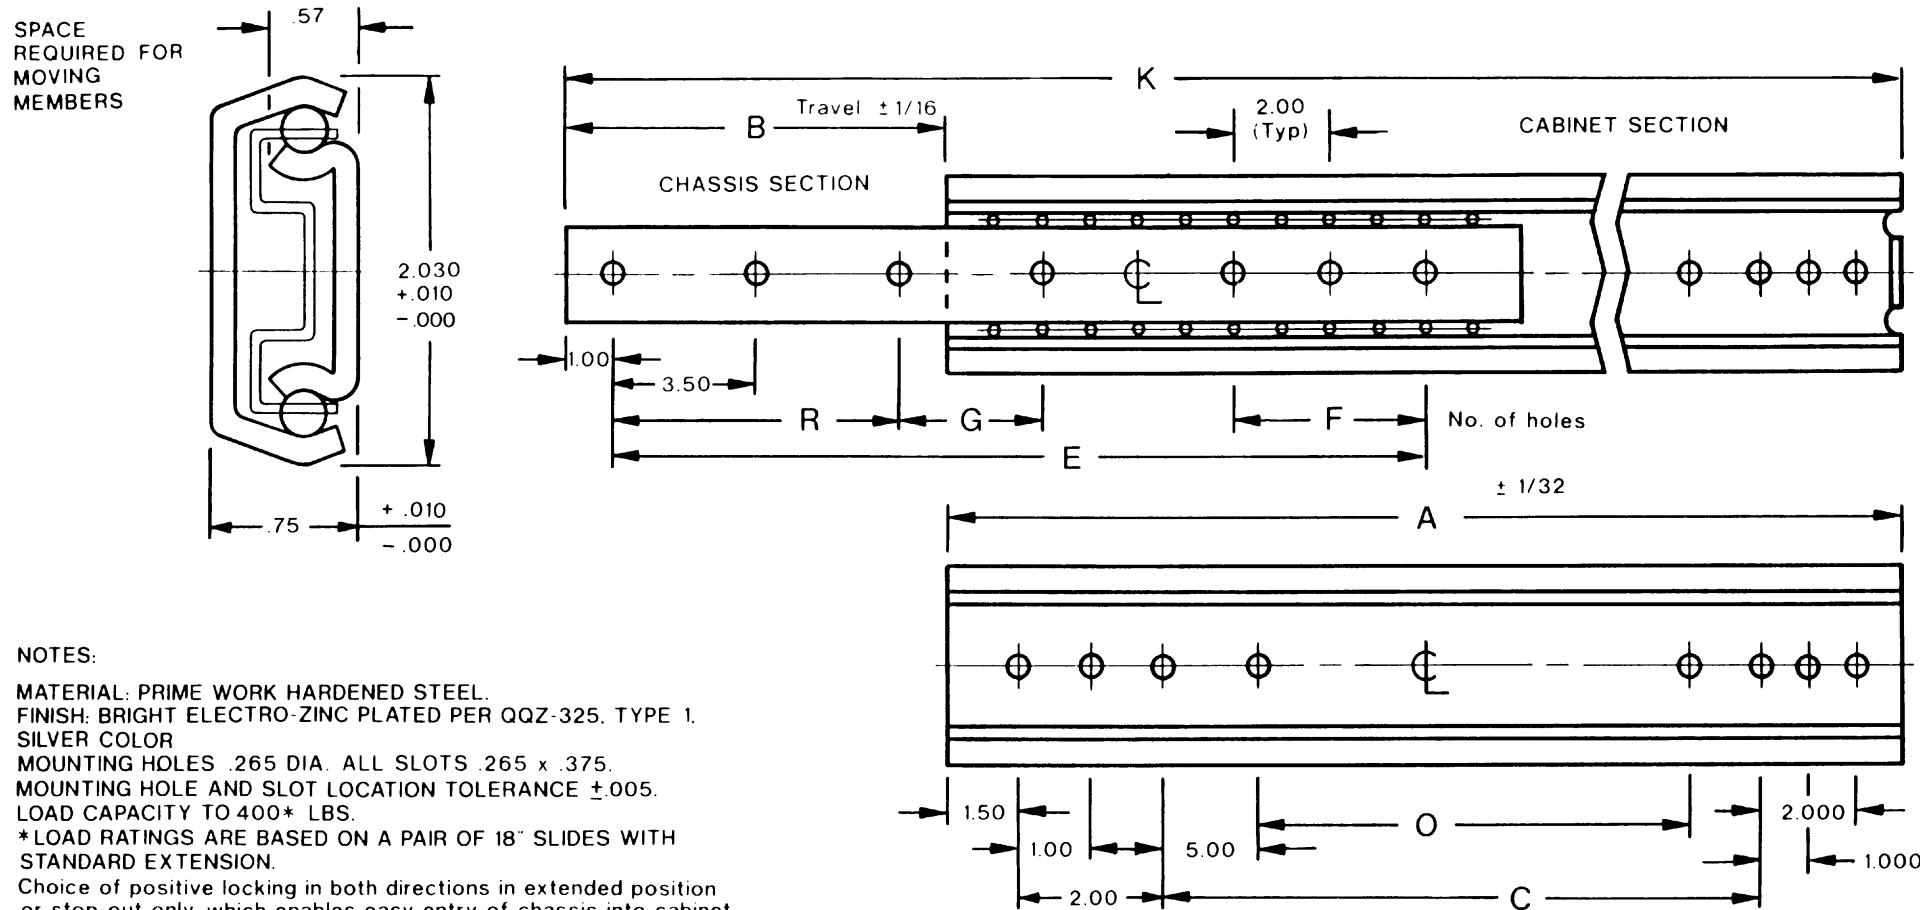

NOTES:

MATERIAL: PRIME WORK HARDENED STEEL.
 FINISH: BRIGHT ELECTRO-ZINC PLATED PER QQZ-325, TYPE 1.
 SILVER COLOR
 MOUNTING HOLES .265 DIA. ALL SLOTS .265 x .375.
 MOUNTING HOLE AND SLOT LOCATION TOLERANCE $\pm .005$.
 LOAD CAPACITY TO 400* LBS.
 *LOAD RATINGS ARE BASED ON A PAIR OF 18" SLIDES WITH STANDARD EXTENSION.
 Choice of positive locking in both directions in extended position or stop-out only which enables easy entry of chassis into cabinet without manipulation of catches.
 Any choice of combinations of lengths, engagements, mounting hole patterns, etc., available at Barnes Engineering Company service at a nominal cost, or, in many cases at no additional cost.
 Any load requirement available by stacking vertically and/or horizontally. Additional holes available at Barnes Engineering Co.'s option. Front and rear mounting brackets are available.

When ordering, please specify features needed; e.g.
 HD2B-20-PL (Positive locking when extended)
 HD2B 20 -SO (Stop-out only)
 .FD (Fast disconnect)
 HD2BM (Military model)

SLIDE DIMENSIONS									
MODEL	A	B	C	E	F	G	K	O	R
HD2B-10	10	7	3	8	1		17		
HD2B-12	12	9	5	10	1		21		
HD2B-14	14	11	7	12	1		25		
HD2B-16	16	12	9	14	1		28		
HD2B-18	18	13	11	16	2		31		
HD2B-20	20	15	13	18	2		35	3	5.5
HD2B-22	22	16	15	20	3		38	5	5.5
HD2B-24	24	17	17	22	3	*	41	7	5.5
HD2B-26	26	19	19	24	4	*	45	9	5.5
HD2B-28	28	20	21	26	4	*	48	11	5.5
HD2B-30	30	22	23	28	5	*	52	13	5.5

* OPTIONAL HOLE UPON REQUEST



BARNES ENGINEERING COMPANY
 2715 DELTA PLACE
 COLORADO SPRINGS, CO. 80910
 TELEPHONE (719) 390-6500
 FAX (719) 390-6700
 www.slimtrack.com